

## ROASTER MU – GP2GC – R56



### AVAILABLE COLORS



### ACCESSORIES



### CABINET OPTIONS



### TECHNICAL INFORMATION

Productivity	± 95 Diners
Fire up time	30 min average
Charcoal daily consumption*	Charcoal 28 – 34 kg
Roasting temperature	250 °C to 350 °C
Exhaust rate	4.600 m3/h

### DIMENSIONS & WEIGHTS

Dimensions (NET)	1985X825X1645 mm
Weight (NET)	587 kg

### INSTALLATION

Clearance with non-flammable equipment	100 mm
Clearance with flammable equipment	300 mm

### INCLUDED

Fire braker	Tong	Grill Scraper	2X Stainless Steel Grill Grates Oven
Clip Tong	Ash Shovel	2X Grill Grate Parrilla	3X Parrilla Upper Grill Racks
Thermal Protection	2x Top GN Trays	Wire Brush	Poker
Grease Collector	Ash Collector Drawer	Charcoal Starter	Packaging

### TECHNICAL INFORMATION ROC56

Productivity + -	75 dinners
Roasting area	535X590 mm
Fire up time	30 min average
Charcoal daily consumption*	Charcoal 10 – 12 kg
Roasting temperature	250 °C to 350 °C
Exhaust rate	2.100 m3/h
Heat Output*	6 kw
Extraction diameter	180 mm
Performance	9h
Dimensions without Packaging	785X825X1645 mm
Dimensions with Packaging	930X1020X1930 mm
Net Weight	327 kg
Gross Weight	380 kg



### TECHNICAL INFORMATION GP2GC

Roasting area	1000X620 mm
Fire up time	30 min average
Charcoal daily consumption*	Charcoal 18 – 22 kg
Grilling temperature	200 °C to 250 °C
Exhaust rate	2.500 m3/h
Dimensions without Packaging	1200X825X1550 mm
Dimensions with Packaging	1350X1020X1790 mm
Net Weight	260 kg
Gross Weight	350 kg




\*Depends on the charcoal quality




**TECHNICAL DRAWINGS**


Front view

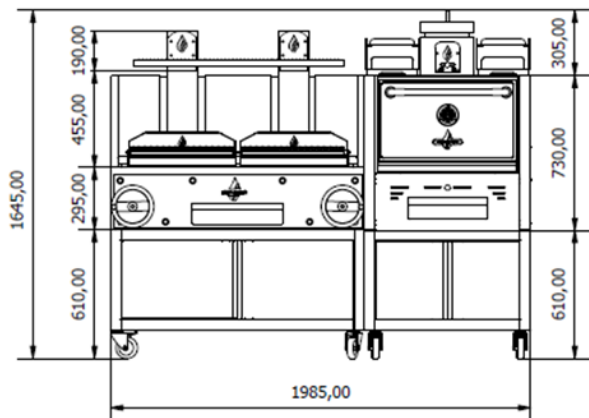


Side view

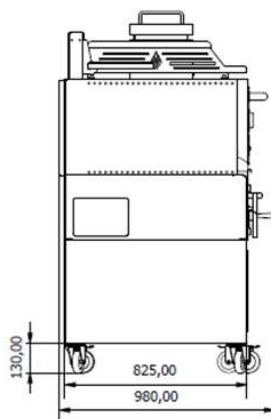


Dimensions with Open Door

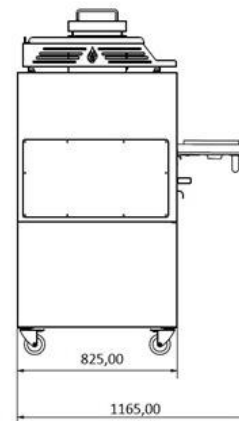


Top view

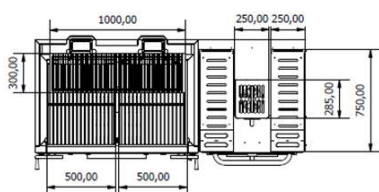


Roasting area Oven



Roasting area Parrilla



**MAIN COMPONENTS**

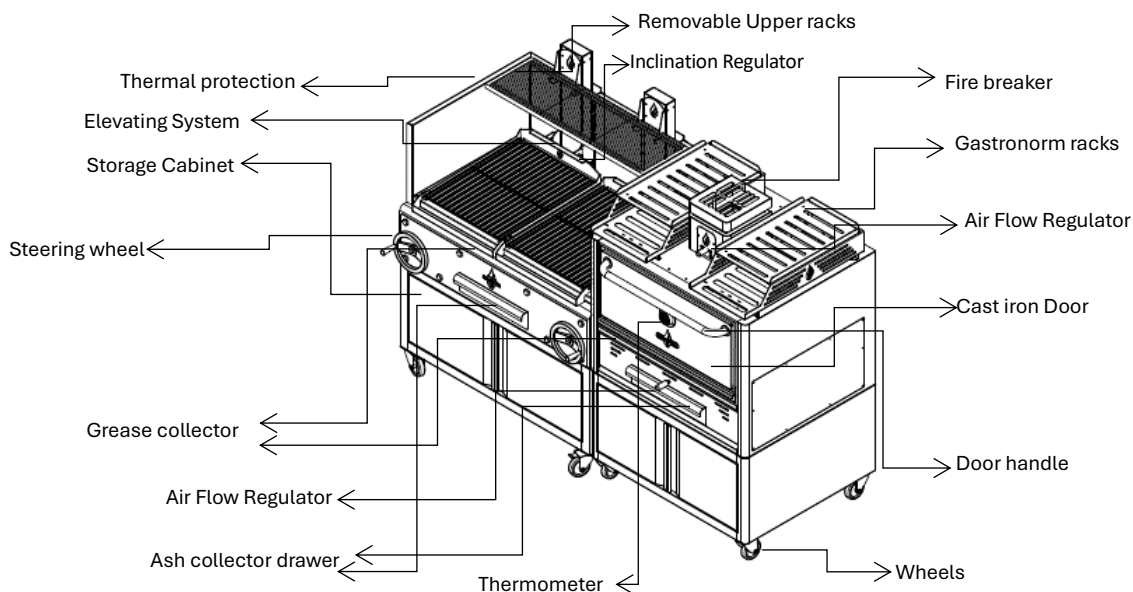

\*Dimensions in mm

\*The charcoal multi is subject to technical and design changes without previous notice

